

## Canopy Light- I

## Fuel Pump Canopy Luminaires / Exterior Fixtures & Retrofit Kits



Only 80W and 100W with DLC 4.0

Model Number	CP-45WA1	CP-80WA1	CP-100WA1	CP-120WA1
PIC Code	C1-045	C1-080	C1-100	C1-120
Wattage	● 45W	▲ 80W	▲ 100W	● 120W
Lumen	3,900 LM	7,000 LM	8,800 LM	10,500 LM
Dimension	8.9" x 8.9" x 7.3" / 12.4" x 12.4" x 9.1"			

### COMMON SPECS:

▲ with DLC 4.0      ● No DLC 4.0

Lumen Efficacy	85~90 LM/W	CCT	4,000K, 5,000K, 5,700K
Viewing Angle	120°	IP Grade	IP65
LED Brand	Epistar SMD2835	Housing	Aluminum
Voltage	AC100~277V 50/60Hz	Power Supply	45W, 80W-Song Sheng, 100W, 120W-Meanwell


Model NO.	PIC Code	Watts	MSRP	PG&E Code
CP-45WA1	C1-045	● 45W	\$140.00	X
CP-80WA1	C1-080	▲ 80W	\$200.00	LT013
CP-100WA1	C1-100	▲ 100W	\$250.00	LT013
CP-120WA1	C1-120	● 120W	\$270.00	x

### How to Order:

CP - 80WA1 - 5700k  
Product Watts CCT

## Canopy Light- II

## Fuel Pump Canopy Luminaires / Exterior Fixtures & Retrofit Kits

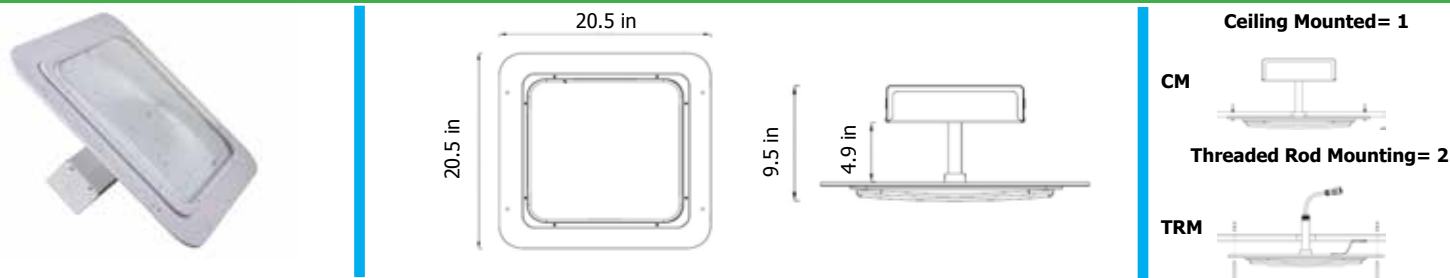

Model Number	CP-150W-332X-1601	CP-180W-132X-1601	CP-240W-132X-1601
PIC Code	C2-150	C2-180	C2-240
Wattage	150W	180W	240W
Lumen	17,000 LM	20,500 LM	27,600 LM

### COMMON SPECS:

with Matte Surface Glass

Voltage	AC100~277V 50/60Hz	LED Brand	LUMILEDS 2835
Power Supply	Meanwell CLG- 150W, Meanwell - 180W, 240W	CCT	4,000K, 4,500K, 5,000K, 5,700K
Lumen Efficacy	110~115 LM/W	IP Grade	IP65
Viewing Angle	110°	Housing	Aluminum

Model NO.	PIC Code	Watts	MSRP	PG&E Code
CP-150W-332X-1601	C2-150	150W	\$320.00	LT011
CP-180W-132X-1601	C2-180	180W	\$350.00	LT011
CP-240W-132X-1601	C2-240	240W	\$390.00	LT009

### How to Order:

CP - 150W - 332 - X - 5700  
Product Watts Power & LED Mounting 1 or 2 CCT

CP - 180W or 240W - 132 - X - 5700  
Product Watts Power & LED Mounting 1 or 2 CCT

For Volume Discount, and Utility Rebate Program, please call us.

1601 = AC 100 ~ 277V      1602 = AC 200 ~ 480V