

Down Light - 4" & 5"~6"

Accent and Directional Fixtures



4 inch



5 ~ 6 inch

Model Number	PIC Code	LED Qty./ Type	Watts	Net Weight	Dimension	Power Supply Efficiency	Luminous Flux
D10308W	DL-08	40PCS / SMD 2835	8 W	147g	86MM*Φ130MM	> 85%	>560 Lm
D19012W	DL-12	60PCS / SMD 2835	12 W	227g	87MM*Φ190MM	> 90%	>1,000 Lm

COMMON SPECS:

Light Angle	90°	CCT	5,000K
R9	>0	PF	>0.9
Input Voltage	AC 120V	Waterproofing Grade	IP20
Lifespan	> 50,000 H	Effect of light	100W
Working Humidity	0 ~ 70%	Storage Temperature	-40°C ~ 60°C
Storage Humidity	0 ~ 95%	Storage Humidity	0 ~ 95%
Dimmable Type	Triac Dimmable	Working Temperature	-20°C ~ 55°C
Connector	E26	CRI	>90
Lighting Efficiency	>70 Lm/W	Harmonic	< 20%
Power Supply Mode	E26	Input Current	0.1 A
Lamp Base	E26	Material	Aluminum + PC
IP Rate	IP40	Frequency	50/60Hz

Optional:



4"




5" ~ 6"




4"



5" ~ 6"



4"

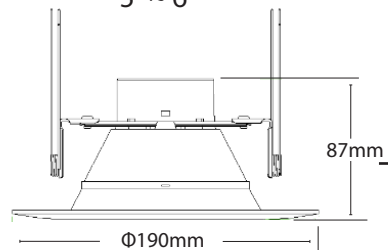

5" ~ 6"

Model NO.	PIC Code	Watts	PG&E Code	MSRP
D10308W	DL-08	8W	LD129	\$12.95
D19012W	DL-12	12W	LD133	\$14.60

How to Order: 4" = $\frac{\text{D103}}{\text{Product}} - \frac{8}{\text{Watts}} - \frac{5,000\text{K}}{\text{CCT}}$

5"~6" = $\frac{\text{D190}}{\text{Product}} - \frac{12}{\text{Watts}} - \frac{5,000\text{K}}{\text{CCT}}$

For Volume Discount, and Utility Rebate Program, please call us.