

# High Bay- Linear

## High-Bay Luminaires for Commercial / High Bay Fixtures & Retrofit Kits



100W - Hook & Chain



150W - Bracket




240W - Hook & Chain

Model Number	H50SSTXA1	H100SSTXA1	H150HLTXA1	H200HLTXA1	H240HLTXA1
PIC Code	HL-050	HL-100	HL-150	HL-200 / HL-200M	HL-240 / HL-240M
Wattage/Power Supply	50W / Song Sheng	100W / Song Sheng	150W / Meanwell	200W / Meanwell	240W / Meanwell
Lumen	6,500 LM	13,000 LM	19,500 LM	26,000 LM	31,200 LM
Chain: dimension	329*142.2*112.5MM	624*142.2*112.5MM	919*142.2*112.5MM	1214*142.2*112.5MM	1509*142.2*112.5MM
Hook: dimension	417*142.2*167MM	712*142.2*167MM	1007*142.2*167MM	1302*142.2*167MM	1597*142.2*167MM
Number of Modules	1	2	3	4	5
Dimmer	NO		** Only 150W, 200W, 240W can add the Microwave Motion Sensor Yes - Option: MS		


### COMMON SPEC :

Lumen Efficacy	125~130 LM/W	CCT	4,000K, 5,000K, 5,700K
Viewing Angle	* T1: 90° ; T2: 100°x65° ; T3: 135°x70°	IP Grade	IP 65
Voltage	AC100~277V 50/60Hz (internal driver)	Housing	Black
LED Brand	Lumileds (also known as Philips)	Mounting	Bracket = B / Hook w/42" Chain = C



150W-3

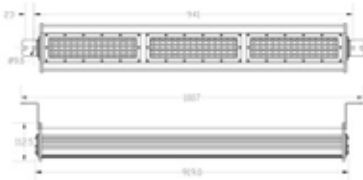

200W-4

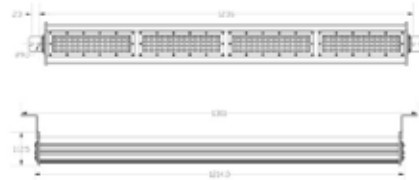

240W-5

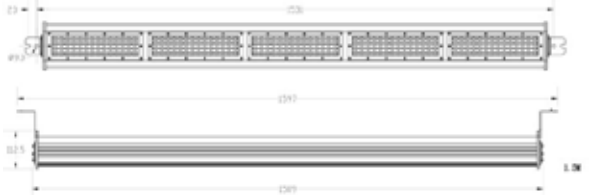

### Viewing Angle

\* T1 (90°) / T2 (100° x 65°) / T3 (135° x 70°)

- 50W & 100W only T1 Angle with DLC
- 150W, 200W & 240W can be Angle T1, T2, T3 with DLC
- 50W, 100W, 150W, 200W, 240W only CUL & UL with T1, T2, T3.

### How to Order:

H	50	HLT	T3	C	5700K	**	MS
Product	Watts	Power Supply	* Lens Angle	Bracket = B Hook & Chain = C	CCT	Optional: Microwave Motion Sensor = MS	
		SST: SongSheng, For 50W, 100W					
		HLT: Mean Well, For 150W, 200W, 240W					

Model NO.	PIC Code	Watts	MSRP	PG&E Code
H50SST1A1	HL-050	50W	\$120.00	LD101
H100SST1A1	HL-100	100W	\$170.00	LD101
H150HLTXA1	HL-150	150W	\$290.00	LD102
H200HLTXA1	HL-200/HL-200M	200W	\$370.00	LD104
H240HLTXA1	HL-240/HL240M	240W	\$420.00	LD105

### Optional: Microwave Motion Sensor

Model NO.	Watts	MSRP	PG&E Code
MS		\$39.00	

For Volume Discount, and Utility Rebate Program, please call us.