

Ground Flood Light

Architectural Flood and Spot Luminaires / Exterior Fixtures & Retrofit Kits



40W



80W



120W 150W


Model Number	▲ FL- 40WCA1	▲ FL- 80WCA1	● FL-120WCA1	● FL-150WCA1
PIC Code	GL-40	GL-80	GL-120	GL-150
Wattage/Power Supply	40W/ Song Sheng	80W/ Song Sheng	120W/ Meanwell	150W/ Meanwell
Lumen	4,400LM	88,000LM	13,200LM	16,500LM
Dimension - TM	240*175*241MM	320*243*355MM	430*265*395MM	430*265*395MM

COMMON SPEC:

▲ with DLC 4.0


● No DLC 4.0

Lumen Efficacy	100~115 LM/W	CCT	3,000K, 3,500K, 4,000K, 5,000K, 5,700K
Viewing Angle	110°	IP Grade	IP 65
Voltage	AC100~277V 50/60Hz	Housing	Aluminum + Stalinite
LED Brand	Lumileds	Housing Color	Brown - standard / Vermilion - optional

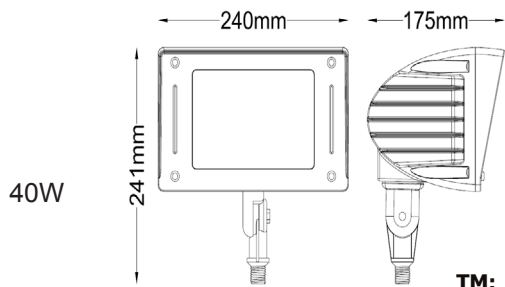


40W

TM: Teeth Mounting

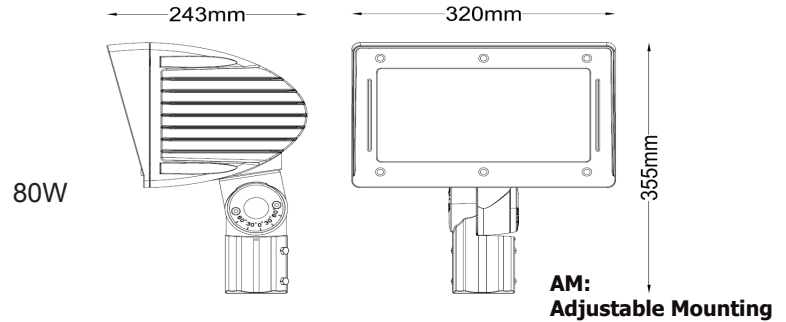

80W

AM: Adjustable Mounting

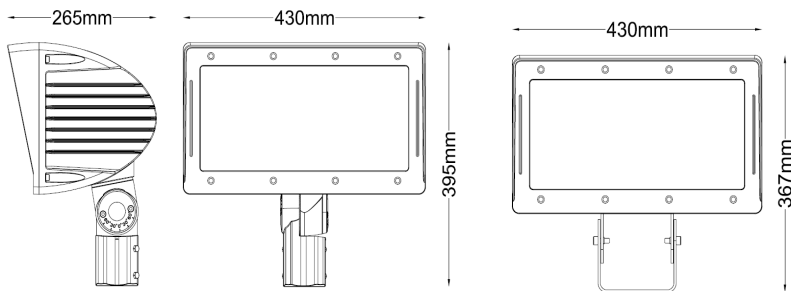

120W/150W

YM: Yoke Mounting

Model NO.	PIC Code	Watts	MSRP	PG&E Code
FL- 40WCA1 ▲	GL-40	40W	\$120.00	LT015
FL- 80WCA1 ▲	GL-80	80W	\$230.00	LT013
FL-120WCA1 ●	GL-120	120W	\$360.00	N/A
FL-150WCA1 ●	GL-150	150W	\$380.00	N/A

How to Order:

FL — 80WCA1 — AM
 Product — Watts — Bracket
 AM, TM, YM

For Volume Discount, and Utility Rebate Program, please call.