

Wall Pack - Small Size with Photocell

Outdoor Non-Cutoff and Semi-Cutoff Wall-mounted Area Luminaires
Exterior Fixtures & Retrofit Kits






16W / 28W

Model Number	PIC Code	Wattage	Lumen	Source	CRI	Cover Type
WP-GL28-16W	WM-16	16W	>1440 LM	SMD2835	≥80	PC
WP-GL28-28W	WM-28	28W	>2520 LM	SMD2835	≥80	PC

COMMON SPEC:

Lumen Efficiency	>90 lm/W	CCT	3,000K, 4,000K, 5,000K, 5,700K
Beam Angle	120°	IP Rate	IP65
Voltage	100~277V 50/60Hz	Driver	Non-isolated driver
Sensor	Photocell	Color	Milky/ Clear

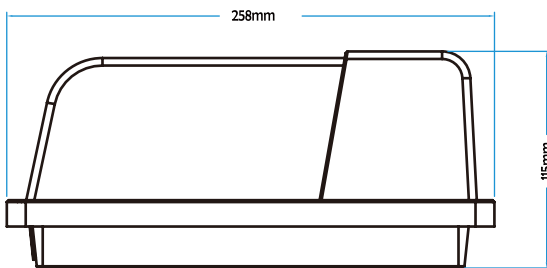

Gasket

Model NO.	PIC Code	Watts	MSRP	PG&E Code
WP-GL28-16W	WS-16	16W	\$ 46.00	LT015
WP-GL28-28W	WS-28	28W	\$ 50.00	LT015

How to Order:

WP-GL28 — 28W — 5700K
Product Watts CCT

For Volume Discount, and Utility Rebate Program, please call.