




Vapor Tight Light High Bay/Low Bay Fixtures & Retrofit Kits

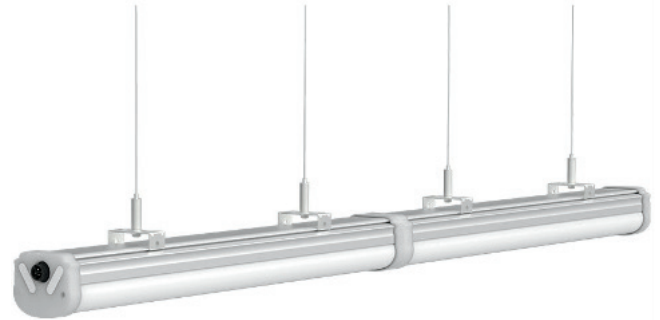

Model Number	PIC Code	Wattage	Lumen	Size
STP8132-24W	VT-24	24W	3,120 LM	126.8cm x 10cm x 11.5cm
STP8232-48W	VT-48	48W	6,240 LM	126.8cm x 16.5cm x 11.5cm

COMMON SPEC:

Beam Angle	120°	Power Efficiency	≥90%
Efficiency with Ballast	> 135 LPW	Input Voltage with Ballast	100 ~ 277V
Operation Temperature	-30 ~ 50C°	Frequency	50 ~ 60Hz
CRI	>80	Power Factor	> 0.95
Input Voltage	AC100 ~ 277V	Rated Life	5 Years hours
Lumen	6831 LM	Led Type	SMT 2835
CCT	3,000K, 3,500K, 4,000K, 4,500K, 5,000K, 5,700K	Housing	Aluminum + PC
Color Consistency	4 Steps	Driver	Integrated Driver

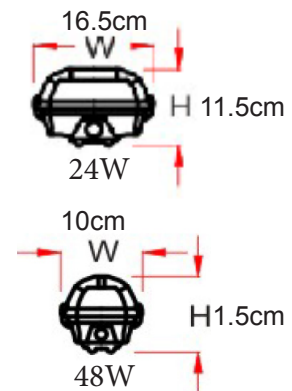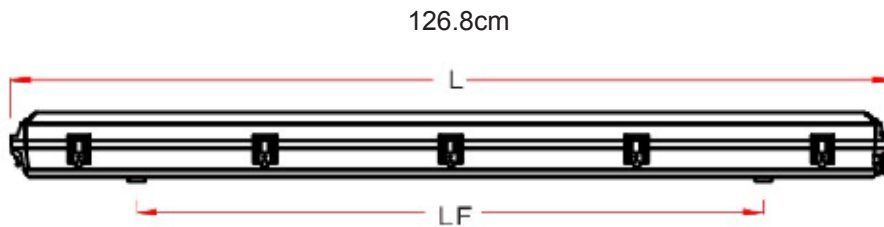

Model NO.	PIC Code	Watts	MSRP	PG&E Code
STP8132-24W	VT-24	24W		
STP8232-48W	VP-48	48W	\$147.50	LD101

How to Order:

For Volume Discount, and Utility Rebate Program, please call.

Minimum order quantity required
Free Shipping for California customers only